

Performance Analysis of SEP and LEACH for Heterogeneous Wireless Sensor Networks

Upasana Sharma¹, Sunil Tiwari²

¹(Department of Electronics and Communication Engineering, Mewar Institute, Vasundhara, Ghaziabad-201012, India)

²(Department of Electronics and Communication Engineering, K. N. G. D Modi Engineering College, Modinagar, Ghaziabad-201204, India)

ABSTRACT: While wireless sensor networks are increasingly equipped to handle more complicated functions, these battery powered sensors which used in network processing, use their constrained energy to enhance the lifetime of the network especially in a heterogeneous settings. Clustered techniques have since been employed to optimize energy consumption in this energy constrained wireless sensor networks. In Classical clustering protocols, equal energy is assigned to all nodes and they cannot take full benefit of the presence of node heterogeneity. SEP, a heterogeneous-aware protocol is used to prolong the time interval before the death of the first node which is crucial for many applications where the feedback from the sensor network must be reliable. The performance of SEP in comparison to LEACH Protocol is analyzed in this paper in which the relation between number of alive node and number of rounds for different base stations and terrain area is analyzed. If the base station is closer to the network nodes die out after more number of rounds when compared to the base station far from the network. For larger terrain area nodes die out after more number of rounds when compared to the smaller terrain area.

Keywords - wireless sensor networks; advanced nodes; network structure; base station

INTRODUCTION

A wireless sensor network is composed of numerous sensor nodes which have sensing, computational ability and self-organizing capability. These sensor nodes can sense its periphery to collect the data such as temperature, humidity and even specific events. Each sensor node communicates with other nodes within its radio communication range [1]. These sensors suffer from power limitation because they are deployed in remote places that are not easy to reach. New sensors have to be deployed to replace the old ones because the life time duration of such devices is very limited. It is some of these limitations that has shown an increasing interest from the scientific community to research in such devices that would enhance the longevity and coverage of the devices by using various new technology developments in this field. The main focus is to enhance the life time of sensors and to use the limited resources efficiently by adopting

mechanisms, algorithms and protocols that consider these limited resources as main priorities and challenges to produce efficient and reliable networks [2].

I. LITERATURE REVIEW

Clustering techniques is used to manage the energy in WSNs. Low Energy Adaptive Clustering Hierarchy (LEACH), a clustering based protocol make use of randomized rotation of cluster-heads to evenly distribute the energy load among the sensors in the network [3]. However, LEACH protocol is not heterogeneity-aware. When the energy is not properly distributed among nodes in the network, the sensors die out faster than they normally should have if they were to maintain their energy uniformly. In real life situation it is difficult for the sensors to maintain their energy uniformly, thus, introducing energy imbalances. LEACH assumes that each node in the network uses equal amount of energy with respect to the overall energy of the system. Conventional protocols such as Minimum Transmission Energy (MTE) and Direct Transmission (DT) [4] do not also assure a balanced and uniformly use of the sensor's respective energies as the network evolves. Stable Election Protocol (SEP) [5], a heterogeneous aware protocol, based on weighted election probabilities of each node to become cluster head according to their respective energy. This approach ensures that the cluster head election is randomly selected and distributed based on the fraction of energy of each node assuring a uniform use of the nodes energy. In the SEP, two types of nodes (two tier in-clustering) and two level hierarchies were considered. SEP prolong the time interval before the death of the first node (refer to as stability period), which is crucial for many applications where the feedback from the sensor network must be reliable.

II. HETEROGENEOUS WSN MODEL

In this section, a model of a wireless sensor network in which the nodes are heterogeneous in their initial amount of energy is described. In this

model some percentage of the population of sensor nodes assembled with more energy resources than the rest of the nodes. Let m be the fraction of the total number of nodes n , which are equipped with α times more energy than the others. These powerful nodes are *advanced* nodes, and the rest $(1 - m) \times n$ are *normal* nodes. All nodes are distributed uniformly over the sensor field.

Clustering Hierarchy

A sensor network that is hierarchically clustered is considered here. The LEACH (Low Energy Adaptive Clustering Hierarchy) protocol [6] maintains such clustering hierarchy. In LEACH, random rotation of cluster head is used to evenly distribute the energy among the network. Only the cluster head has to report to the sink and may expend a large amount of energy, but this happens periodically for each node. In LEACH there is an optimal percentage p_{opt} (determined a priori) of nodes that has to become cluster heads in each round assuming uniform distribution of nodes in space. If the nodes are *homogeneous*, then in LEACH protocol each node will become a cluster head exactly once every $1/p_{opt}$ rounds. Initially each node can become a cluster head with a probability p_{opt} . On average, $n \times p_{opt}$ nodes must become cluster heads per round per epoch. Nodes that are elected to be cluster heads in the current round can no longer become cluster heads in the same epoch. The non-elected nodes belong to the set G and in order to maintain a steady number of cluster heads per round, the probability of nodes $\in G$ to become a cluster head increases after each round in the same epoch. The decision is made at the beginning of each round by each node $s \in G$ independently choosing a random number in $[0, 1]$. If the random number is less than a threshold $T(s)$ then the node becomes a cluster head in the current round. The threshold is set as:

$$T(s) = \begin{cases} \frac{p_{opt}}{1 - p_{opt} \left(\frac{r}{p_{opt}} \right)} & \text{if } s \in G \\ 0 & \text{otherwise} \end{cases}$$

where r is the current round number. The election probability of nodes $\in G$ to become cluster heads increases in each round in the same epoch and becomes equal to 1 in the last round of the epoch. How the election process of cluster heads should be adapted appropriately to deal with *heterogeneous* nodes is shown here, which means that *not* all the nodes in the field have the same initial energy.

Optimal Clustering

The clustering is said to be optimal when the energy consumption is well conveyed to all sensors in the network and the total energy consumption is minimum. Such optimal clustering highly relay upon the energy model used here [6].

According to the radio energy dissipation model illustrated in Figure 1, in order to achieve an acceptable Signal-to-Noise Ratio (SNR) in transmitting an L -bit message over a distance d , the energy expended by the radio is given by [28]:

$$E_{Tx}(l, d) = \begin{cases} L \cdot E_{elec} + L \cdot \epsilon_{fs} \cdot d^2 & \text{if } d < d_0 \\ L \cdot E_{elec} + L \cdot \epsilon_{mp} \cdot d^4 & \text{if } d > d_0 \end{cases}$$

where E_{elec} is the energy dissipated per bit to run the transmitter or the receiver circuit, ϵ_{mp} and ϵ_{fs} depend on the transmitter amplifier model we used, and d is the distance between the sender and the receiver. To receive an L -bit message the radio expends:

$$E_{RX}(k) = E_{elec} * k$$

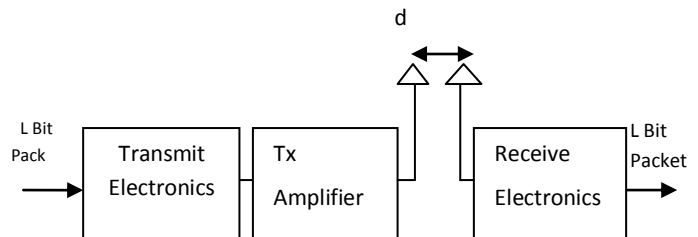


Figure 1. Radio Energy Dissipation Model


In homogeneous network, unstable region will be very less for LEACH. After the death of the first node, all the remaining nodes are expected to die on average within a small number of rounds as a consequence of the uniformly remaining energy due to the well distributed energy consumption. Even when the system perform in the unstable region, if the spatial density of the sensor network is large, the probability that a large number of nodes be elected as cluster heads is significant for a significant part of the unstable region. In this case, even though the system is unstable in this region, still have a relatively reliable clustering (sensing) process. The same can be noticed when the p_{opt} is large and spatial density is very low. However, LEACH produce the higher unstable region for heterogeneous network. The reason behind it is that all advanced nodes are equipped with almost the same energy but the election of cluster head is unstable and most of the time these nodes are not

used because there is no cluster head to communicate.

This problem of improper cluster head selection is overcome by SEP. SEP enhance the stable region and as a result decrease the unstable region and improve the quality of the feedback of wireless clustered sensor networks, in the presence of heterogeneous nodes.


III. PERFORMANCE OF LEACH AND SEP

We simulate a clustered wireless sensor network in a field with dimensions 100m x 100m and 50m x 50m. The population of the sensors is equal to $n = 100$ and the nodes, both normal and advanced, are randomly (uniformly) distributed over the field. We placed the BS at a far distance from all other nodes. We simulate the results for 50m x 50m plot and 100m x 100m plot when our BS is located at (50, 300) and (50,200) so that the BS is at least 100m from the closest sensor node. The initial energy of a normal node has been set to $E_o = 0.5J$.

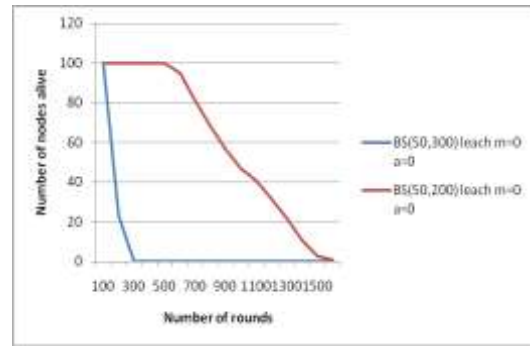


(c)


Fig 1 (a) . Performance results of SEP in presence of heterogeneity for different BSs. (b) Performance results of LEACH in presence of heterogeneity for different BSs. (c) Performance results of LEACH for homogeneous for different BSs.

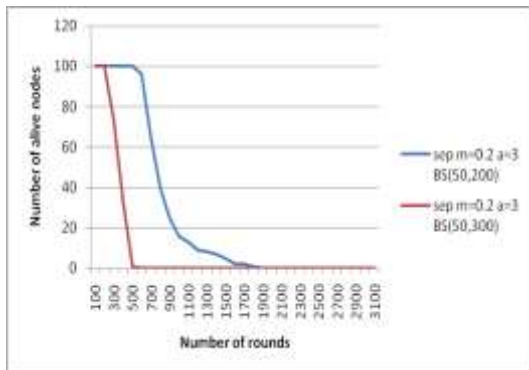


(a)

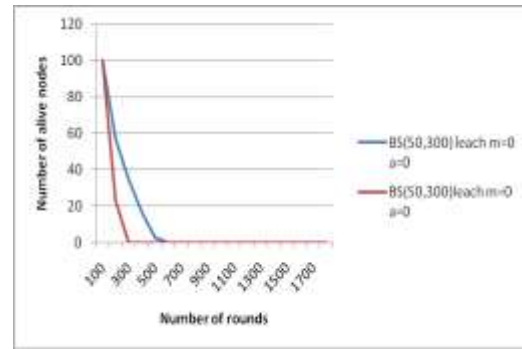


(a)

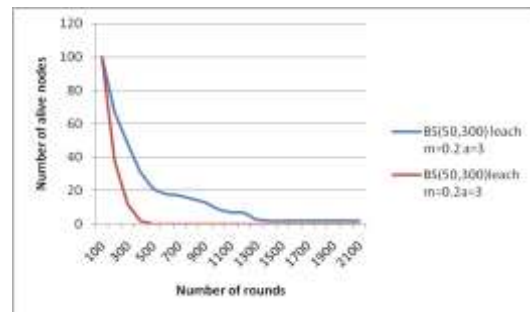

(b)

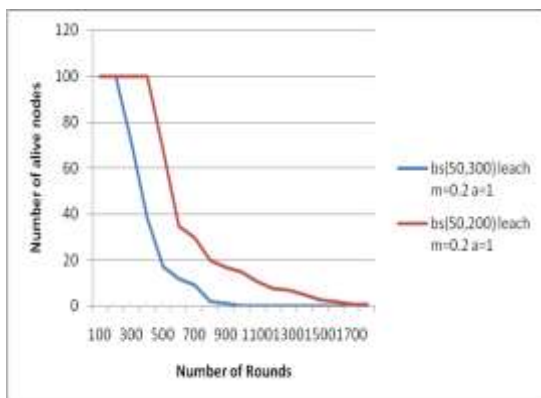

(b)

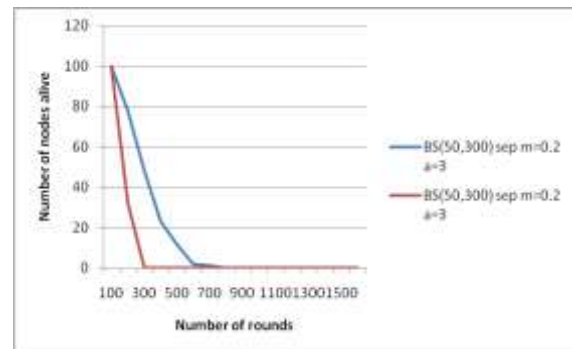

(c)

Fig 2. (a) Performance results of LEACH for homogeneous network for 50m x 50m and 100m

x 100m field. (b) Performance results of LEACH in presence of heterogeneity for 50m x 50m and 100m x 100m terrain area. (c) Performance results of SEP in presence of heterogeneity for 50m x 50m and 100m x 100m terrain area.

Figure 1 shows the relation between number of alive node and number of rounds for different base stations. It is analyzed that if the base station is closer to the network nodes die out after more number of rounds when compared to the base station far from the network.

Figure 2 shows the relation between number of alive nodes and number of rounds for different terrain area. It is analyzed that for larger terrain area nodes die out after more number of rounds when compared to the smaller terrain area.

IV. CONCLUSION

The performance of SEP and LEACH is analyzed in this paper. The relation between number of alive node and number of rounds for different base stations is analyzed. It is analyzed that if the base station is closer to the network nodes die out after more number of rounds when compared to the base station far from the network. The relation between number of alive nodes and number of rounds for different terrain area is also analyzed. It is analyzed that for larger terrain area nodes die out after more number of rounds when compared to the smaller terrain area.

V. Acknowledgements

The author wish to acknowledge Mewar University for supporting the present work.

REFERENCES

- [1] Neha Rathi, Jyoti Saraswat and Partha Pratim Bhattacharya, "A Review On Routing Protocols For Application In Wireless Sensor Networks", *International Journal of Distributed and Parallel Systems (IJDPS)* Vol.3, No.5, September 2012 , pp : 39-58.
- [2] S.Prasanna and Srinivasa Rao, " An Overview of Wireless Sensor Networks Applications and Security", *International Journal of Soft Computing and Engineering (IJSCE)* ISSN: 2231-2307, Volume-2, Issue-2, May 2012.
- [3] Heinzelman, A. P. Chandrakasan, and H. Balakrishnan "An application-specific protocol architecture for wireless microsensor networks," *IEEE Transactions on Wireless Communications*, vol. 1, no. 4, pp. 660–670, October 2002.
- [4] T. J. Shepard, "A channel access scheme for large dense packet radio networks," in *Proceedings of ACM SIGCOMM*, September 1996, pp. 219–230.
- [5] G. Smaragdakis, I. Matta, A. Bestavros, "SEP: A Stable Election Protocol for clustered heterogeneous wireless sensor networks", in: *Second International Workshop on Sensor and Actor Network Protocols and Applications (SANPA 2004)*, 2004.
- [6] W. R. Heinzelman, A. Chandrakasan, and H. Balakrishnan, "Energy-efficient communication protocol for wireless micro sensor networks", In *Proceedings of the 33rd Hawaii International Conference on System Sciences (HICSS-33)*, January 2000.